


RONDO


HVRT TWIN TIP MANUAL

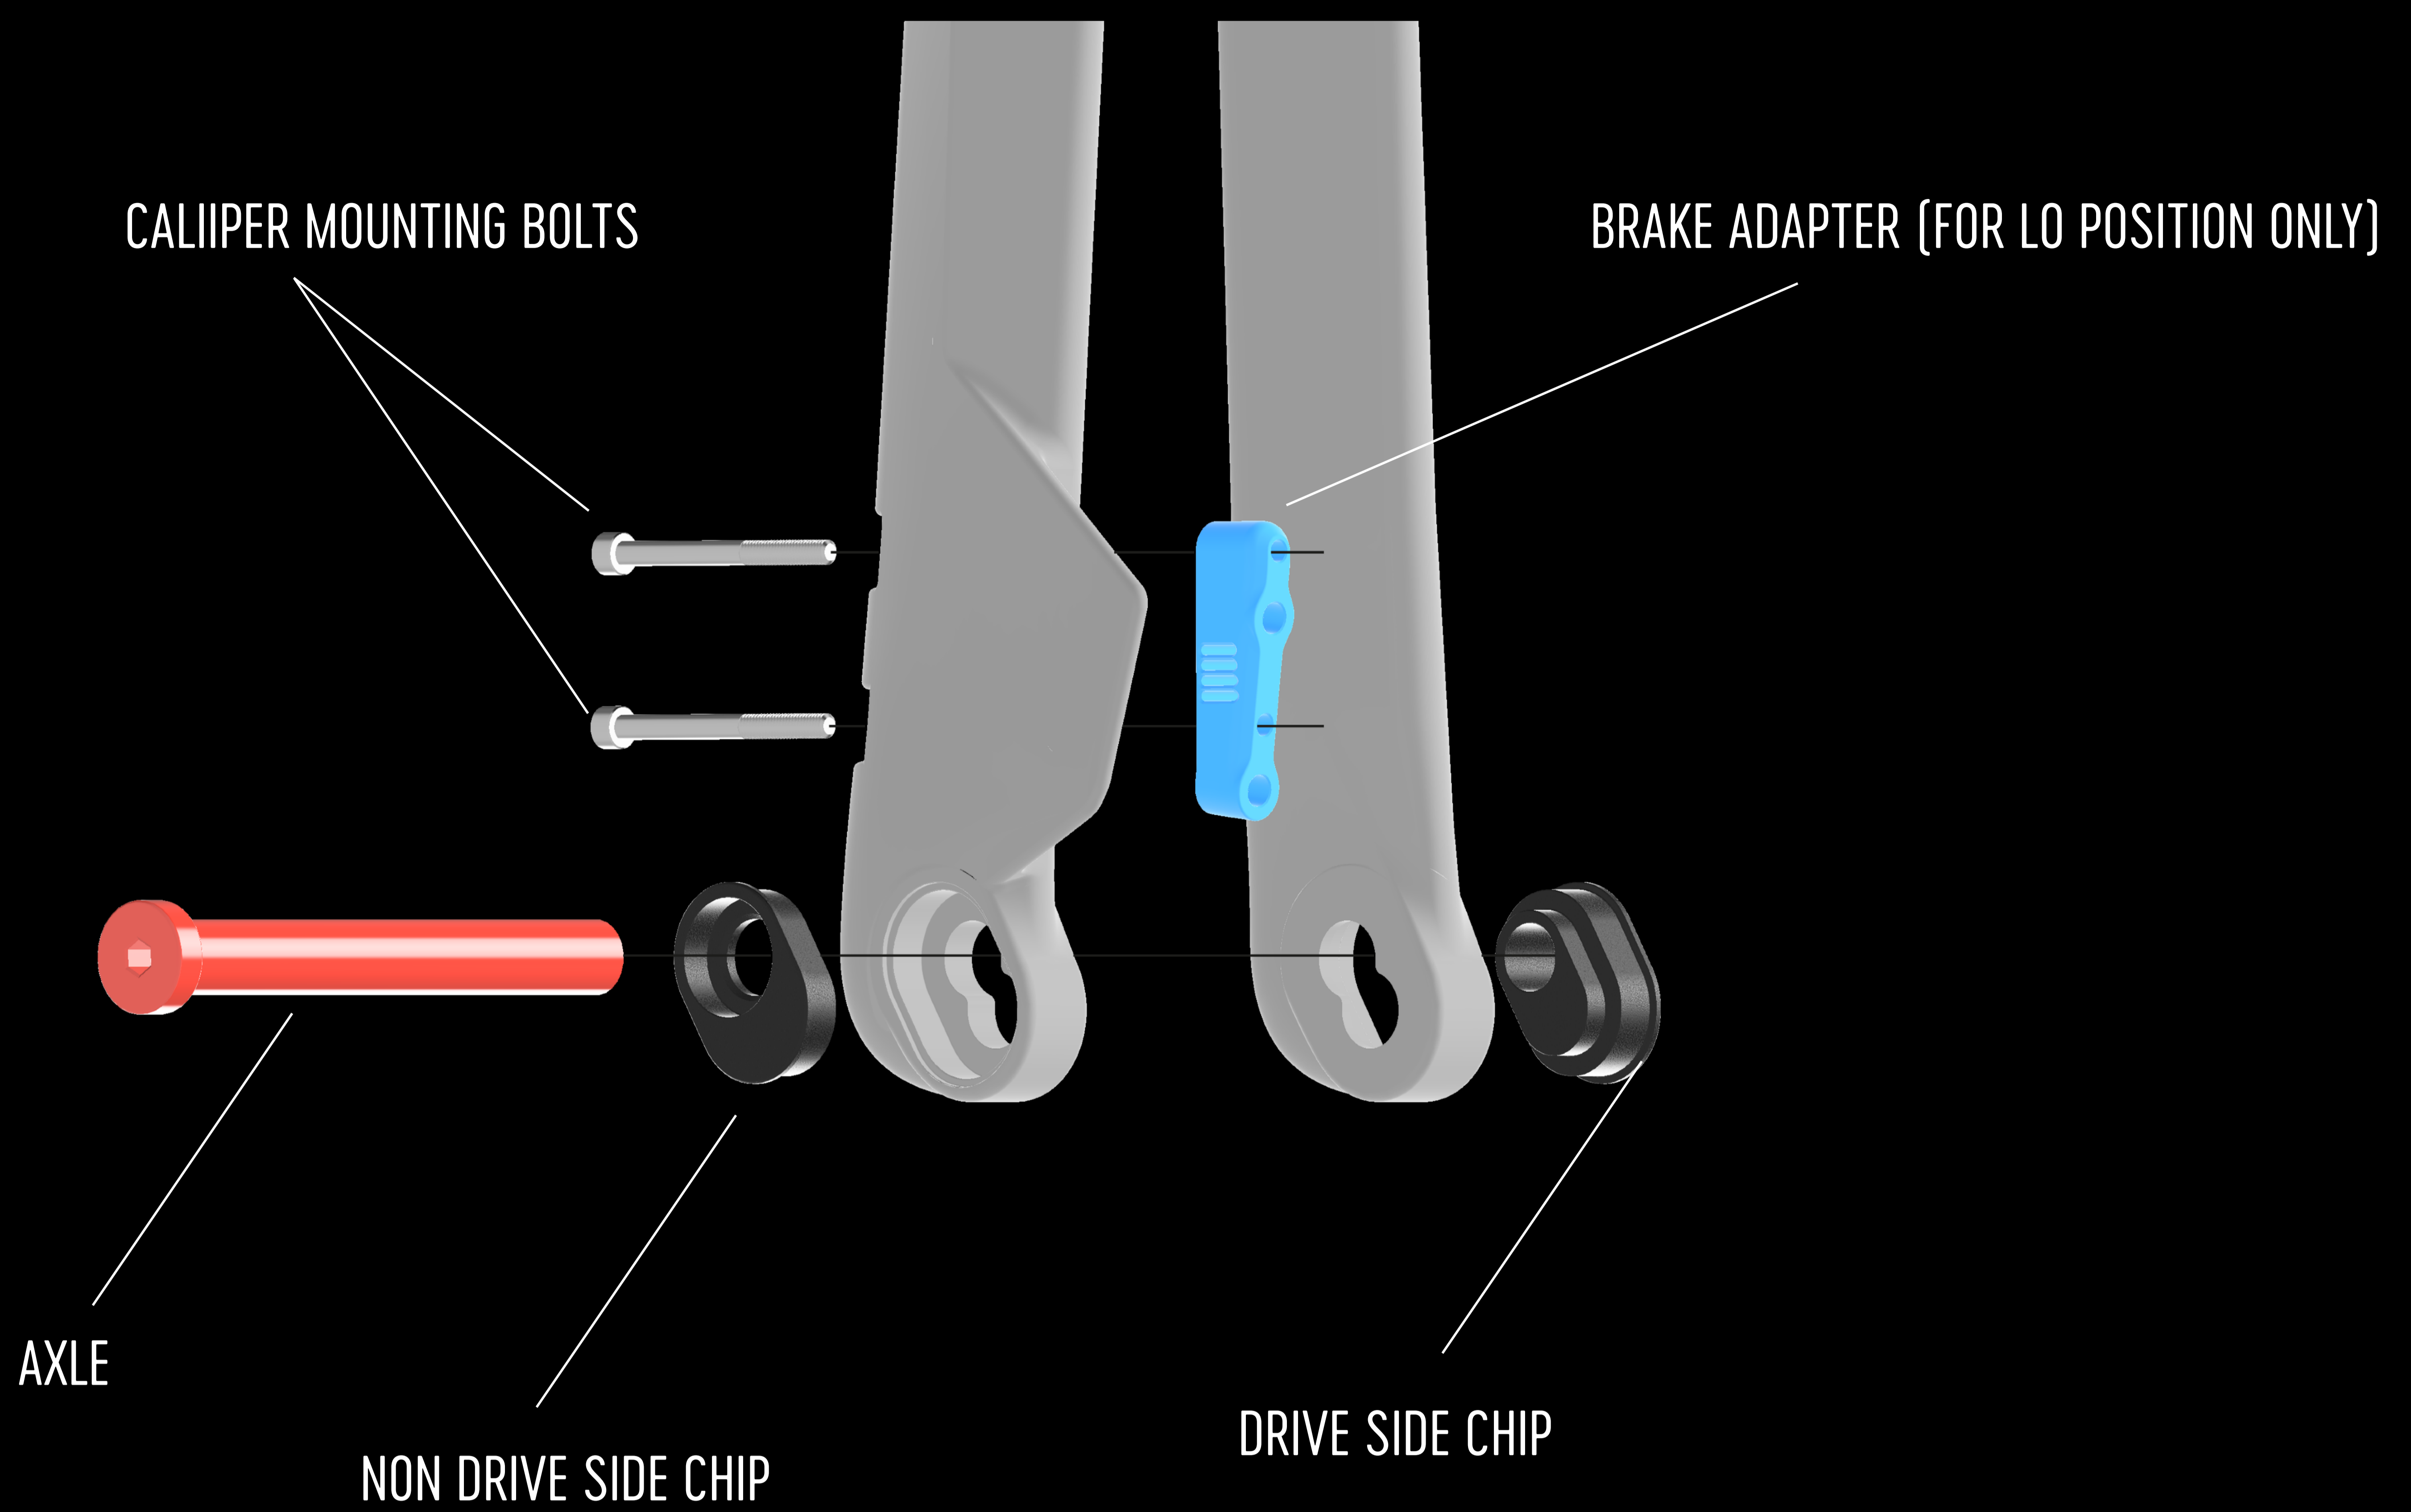

HVRT TWIN TIP as fitted to Rondo HVRT and MUTT bikes MY2020 and newer.

Features:

- 12mm through axle
- single-piece TwinTip insert
- direct flat mount

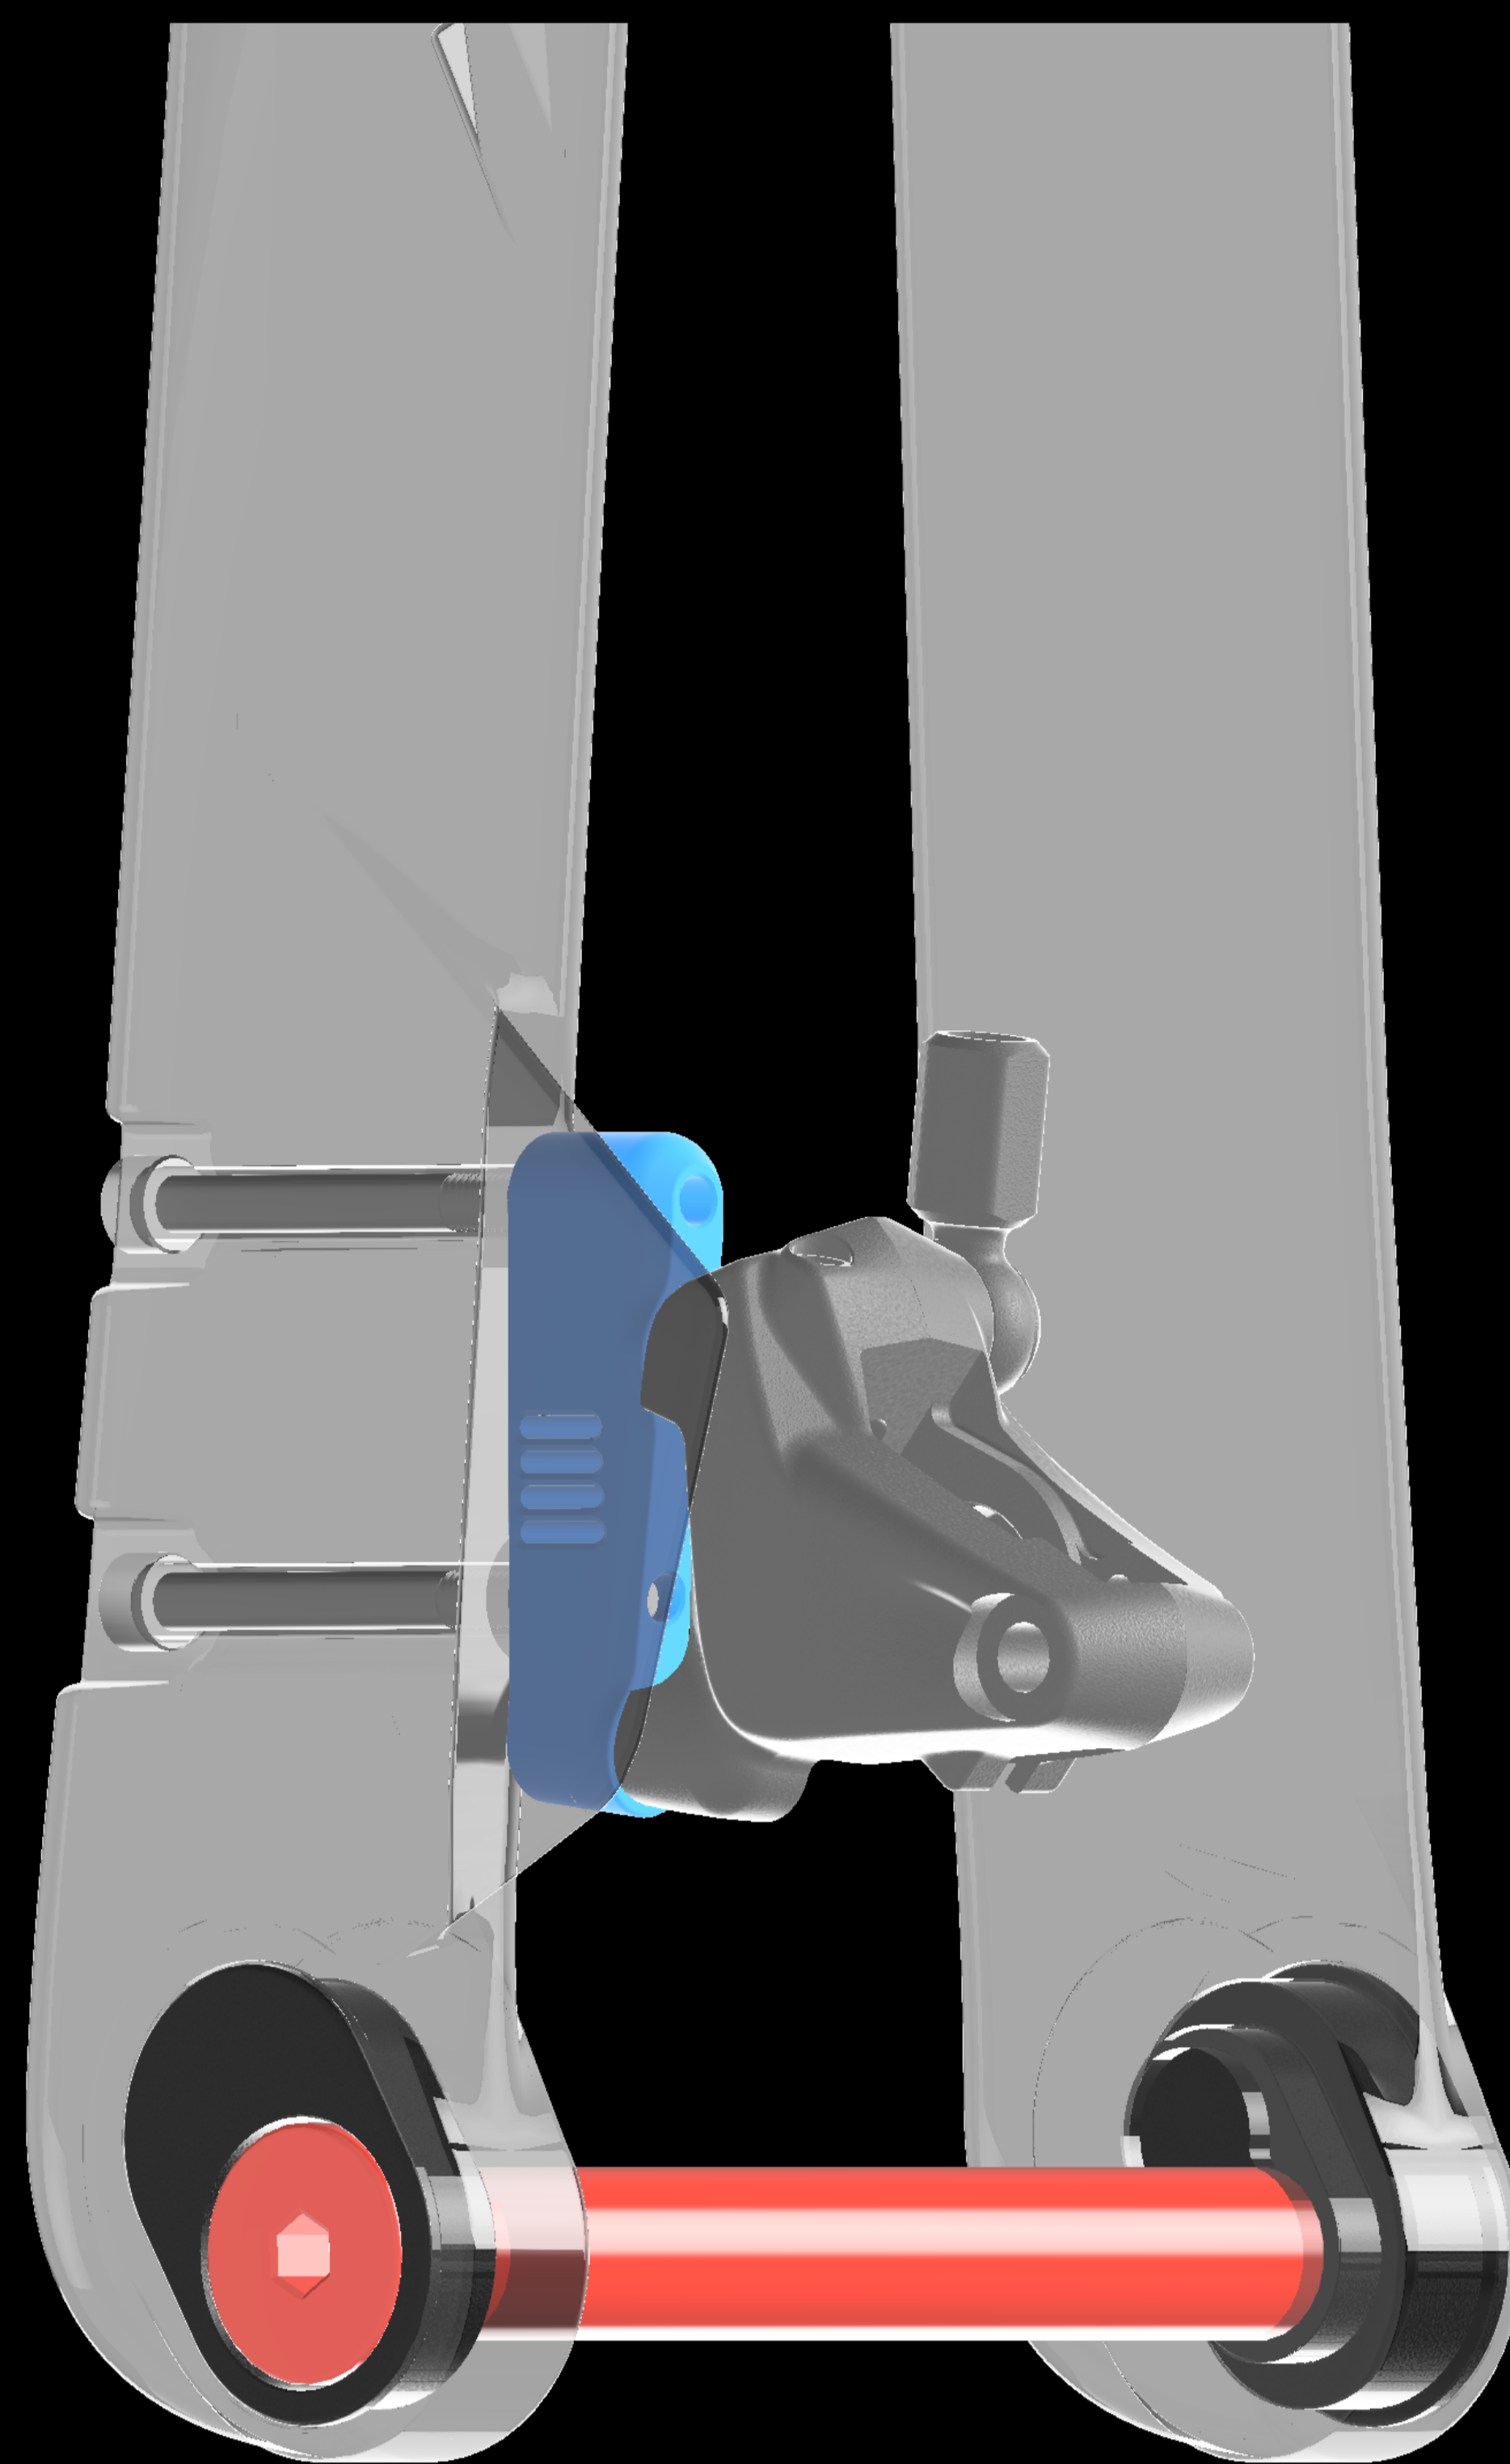


LO

LO position provides 380 mm fork length and 40mm offset
Your bike will come from the factory assembled in this position by default.

To change to **HI** position follow the steps:

- remove axle with 6mm hex key and remove wheel
- remove caliper mounting bolts with 4mm hex key
- unbolt the brake caliper from the adapter
- push out the TwinTip chips from the inside out

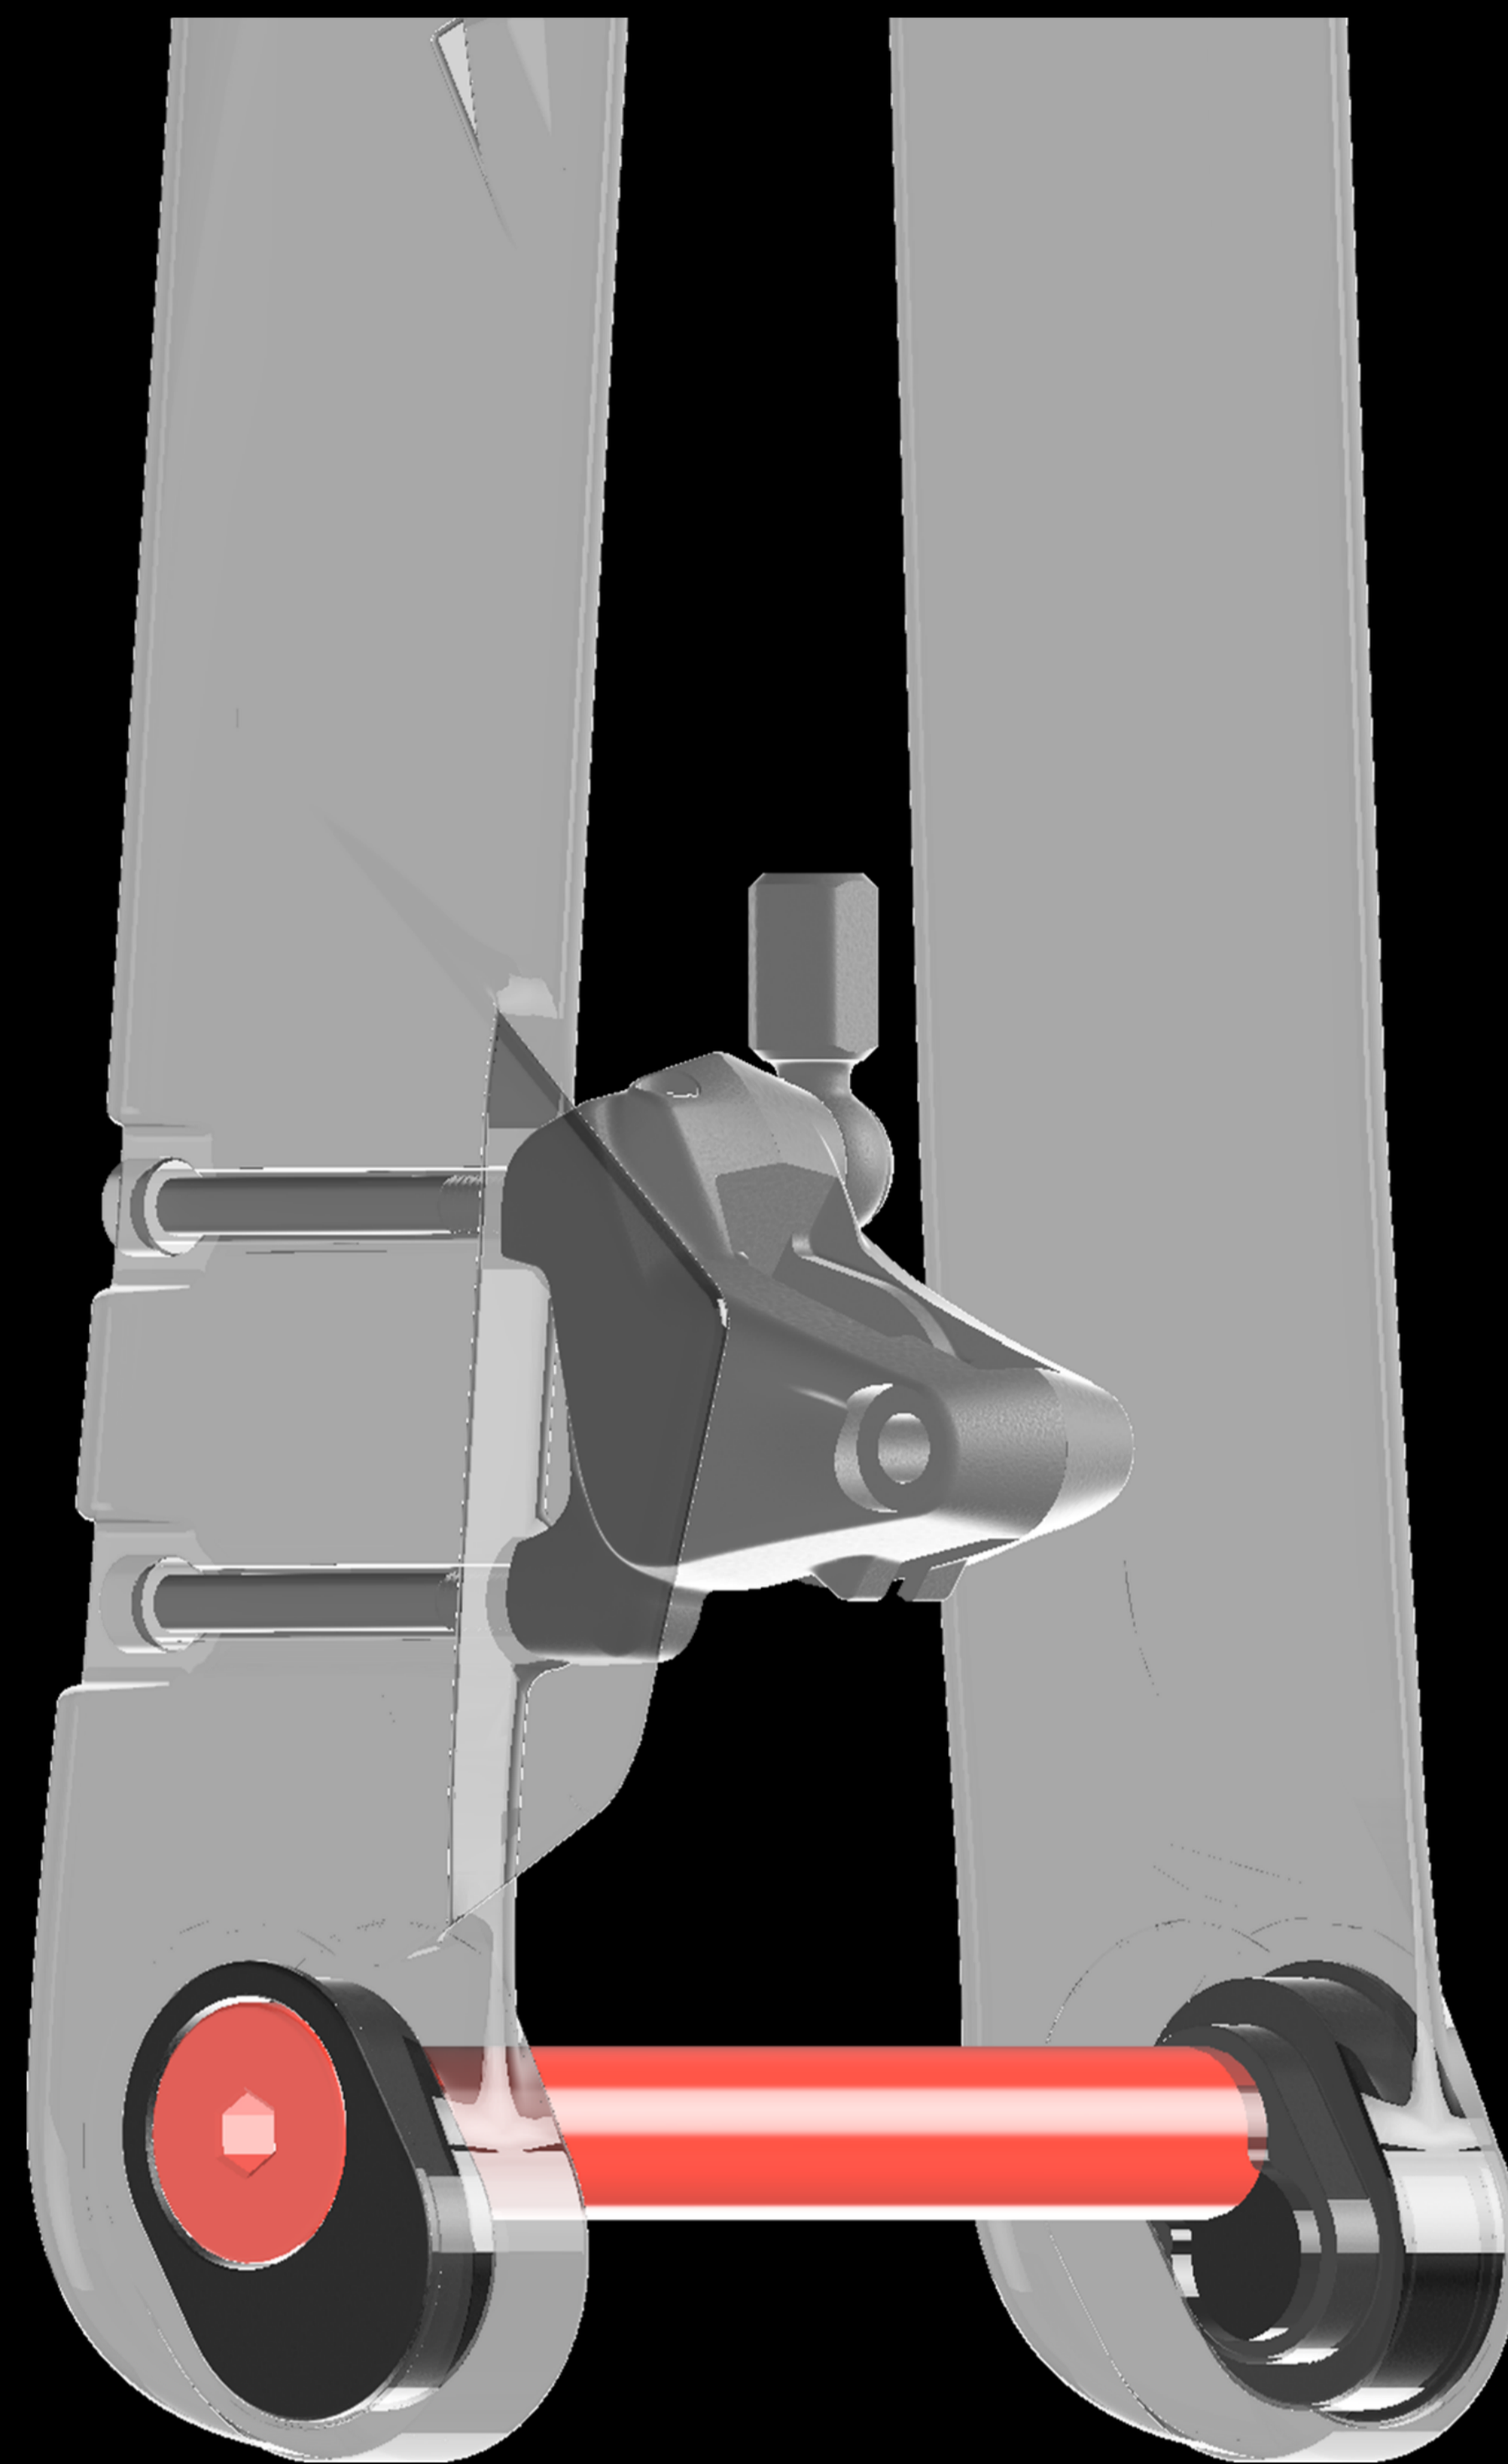

HI

HI position gives 370mm effective fork length and 45mm offset

To assemble in **HI** continue with the following steps:

- flip the removed chip 180° and insert back in the fork
- attach the caliper directly to the fork **without** the adapter
- re-install wheel and the axle
- finally, adjust the caliper to make sure there is no interference with the rotor

RONDO